

PIN OUT

7PIN HOUSING 2*4PIN HOUSING

- 1 RED(20AWG) 1
- 2 BLACK(20AWG) 5
- 3 GREEN 4
- 4 GRAY 2
- 5 BROWN 6
- 6 BLUE 3
- 7 ORANGE 7
- 8 NC 8

LABEL

WMYV
315-00923
REV10
CYBERPOWER
WMYV

REFERENCE TABLE:

Model	CyberPower PN	L+T(mm)	W+T(mm)
CBU7PIN350MLX-004-BLK	1W0-0000160-00G	1045±20	120~130
CBU7PIN350MLX-010-BLK	1W0-0000161-01G	3070±45	140~150

12	MINI TIE	PE/BLACK IN COLOR	2	
11	LABEL	WHITE BACKGROUND AND BLACK TEXT	1	
10	CABLE SPEC	CABLE SPEC DETAIL SEE CHART A&B	1	
9	2*4P HOUSING/M-OUTER MOLD	MOLDING PVC/BLACK IN COLOR	1	
8	2*4P HOUSING/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
7	2*4P HOUSING/M-INSULATOR	PBT/BLACK UL94V-0 (P/N:43645)	1	QUINVI
6	2*4P HOUSING/M-TERMINAL	PHOSPHOR BRONZE/TIN PLATED (P/N:43645-1)	7	
5	7P HOUSING/M-OUTER MOLD	MOLDING PVC/BLACK IN COLOR	1	
4	7P HOUSING/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
3	7P HOUSING/M-THUMB SCREW	STEEL/NICKEL PLATED	7	
2	7P HOUSING/M-INSULATOR	POLYESTER/GREEN UL94V-0	1	
1	7P HOUSING/M-TERMINAL	PHOSPHOR BRONZE/TIN PLATED(43645)	7	
NO.	PARTS NAME	STANDARD SPECIFICATION	Q'TY	SUPPLIER
MATERIAL LIST				

CyberPower®

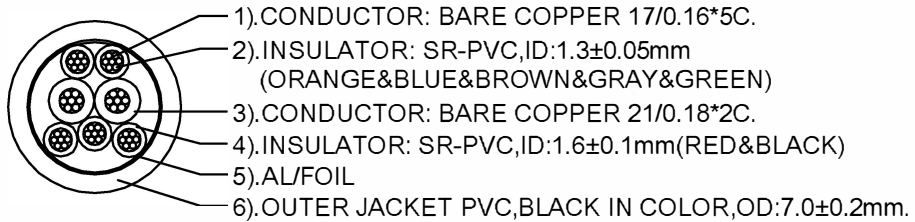


CHART A

NOTES:


1. CABLE SPECIFICATION: UL2464 20AWG*2C+22AWG*5C.
 [21/0.18BC*2C+17/0.16BC*5C+AL/FOIL]*1C.
 OUTER JACKET PVC, BLACK IN COLOR, OD: 7.0±0.2mm.

PRINT WORD: "E313087  AWM STYLE 2464 80°C 300V VW-1 CYBERPOWER".

2. ELECTRICAL TEST

- <1>. 100% OPEN SHORT & MISS WIRE TEST
- <2>. INSULATION RESISTANCE: DC 400V 50M ohm MIN
- <3>. CONDUCTOR RESISTANCE: 3 ohm MAX

3. PACKING: 1PCS/PE BAG.

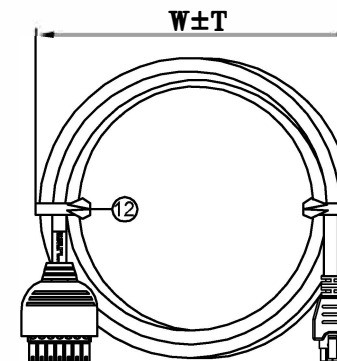

HANK CHART